


## Backlit 210 PET LUVESS SM W

L Latex · UV UV Curable · ES Eco Solvent · S Solvent ·  
SM Semi-Matte · W White

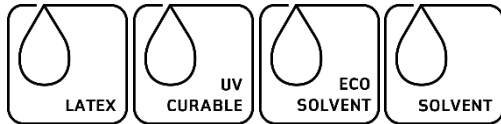

### Technical Data

Thickness:	approx. 210µm
Composition:	100% Polyester
Surface:	semi-matte white
Reverse side:	glossy

### General Information

- Front Print Backlit film, 100% Polyester
- Printable with Latex-, UV curable-, Eco Solvent- and Solvent inks
- High-quality ink receptive coating tolerates very high ink loads
- Quick drying
- Photorealistic print quality, strong and intense colors
- Good water and scratch resistance
- Dimensionally stable
- Night and day useability

### Areas of application

- General advertising
- Citylights
- Backlit boxes

### Advantages

- High quality, water-resistant coating
- Good drying, no bleeding even at very high ink loads
- Very good light diffusion
- can be used without laminating film

com2C GmbH & Co. KG  
Industrieweg 1  
DE – 32457 Porta Westfalica

info@com2-c.de  
www.com2-c.de  
Tel: + 49 (0) 57 33 87 85 88  
Fax: + 49 (0) 57 33 87 85 88 9

These technical information is given based upon normal technical standards and our findings and experience. Due to the multitude of parameters and conditions this product may be used under, every organisation and individual using this product is obliged to test this product for suitability and usability regarding the desired application in own responsibility. Changes reserved. With every newer version, this version loses validity.

## Backlit 210 PET LUVESSE SM W

L Latex · UV UV Curable · ES Eco Solvent · S Solvent ·  
SM Semi-Matte · W White

### Printability

- Very good print results using Latex-, UV curable-, Eco Solvent- and Solvent inks
- High ink loads, no bleeding
- Very quick drying
- Intense, brilliant colors

### Processing instructions

- Prior to conversion / further processing, the prints must be allowed to thoroughly dry. We recommend a drying time of 24 hours.
- Optimum processing conditions 18° - 25°C and a humidity of approx. 40% - 65%.

### Additional information

- Further information about this and other products can be found on our website: [www.caleidoscop.com](http://www.caleidoscop.com)
- The printside / winding, length and widths of the material rolls can be tailored to your needs, respecting our minimum manufacturing quantities. Please ask us for special sizes / special conversion options!
- Please store rolls always together with the label / the batch number. Without these, no complaints can be processed.
- Shelf life: 12 months
- All measurements were made under standard climate conditions.

com2C GmbH & Co. KG  
Industrieweg 1  
DE – 32457 Porta Westfalica

[info@com2-c.de](mailto:info@com2-c.de)  
[www.com2-c.de](http://www.com2-c.de)  
Tel: + 49 (0) 57 33 87 85 88  
Fax: + 49 (0) 57 33 87 85 88 9

These technical information is given based upon normal technical standards and our findings and experience. Due to the multitude of parameters and conditions this product may be used under, every organisation and individual using this product is obliged to test this product for suitability and usability regarding the desired application in own responsibility. Changes reserved. With every newer version, this version loses validity.