

Test Report SL52035299185801TX Date:October 23,2020 Page 1 of 6

TAYA CANVAS(SHANGHAI)CO.,LTD

NO.777 FENGGUAN ROAD, FENGJING INDUSTRIAL PARK, JINSHAN DISTRICT, SHANGHAI, CHINA.

The following sample(s) was/were submitted and identified on behalf of the client as:

Sample Description : (A)Sample(White)

Sample Color : (A)White

Style No. : Spiderweb 300

Sample Receiving Date : Sep 27, 2020

Testing Period : Sep 27, 2020 - Oct 23, 2020

Test Result(s) : Unless otherwise stated the results shown in this test report refer only to the

sample(s) tested, for further details, please refer to the following page(s).

Test Performed : Selected test(s) as requested by applicant

Proposed Care Instruction: -

Signed for and on behalf of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd Testing Center

Hattie Chen (Account Executive)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

3stBuilding,No.889,Yishan Road,Xuhui District Shanghai,China 200233 中国・上海・徐汇区宜山路889号3号楼 邮编: 200233 t (86-21) 61402666 t (86-21) 61402666

f (86-21) 64958763



SL52035299185801TX

Date:October 23,2020

Page 2 of 6

Test Result

Flammability Test

Test Requested:

EN 13501-1:2018 Fire classification of construction products and building elements—Part 1: Classification using data from reaction to fire tests

I. Test conducted

This test is conducted as per EN 13501-1:2018 Fire classification of construction products and building elements

- Part 1: Classification using data from reaction to fire tests. And the test methods as following:
- EN 13823:2010+A1:2014 Reaction to fire tests for building products Building products excluding floorings exposed to the thermal attack by a single burning item.
- EN ISO 11925-2: 2010+Corl:2011 Reaction to fire tests Ignitability of building products subjected to direct impingement of flame — Part 2: Single-flame source test.

II. Details of classified product

a) Nature and end use application

The product "Mesh" is defined as a decorative sheet. Its classification is valid for the following end use application: Billboard.

b) Description

Description	Mesh
Color	White
Sample size	EN 13823: 1500mm×1000mm & 1500mm×495mm EN ISO 11925-2: 250mm×90mm
Mass per unit area	180 g/m ²

Mounting and fixing:

Calcium silicate board, with its density approximate 900kg/m³, thickness approximate 9mm, is as the substrate. The test specimens are fixed mechanically to the substrate. No joint in the specimens.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

3rdBuilding,No.889,Yishan Road,Xuhui District Shanghai,China 200233 中国・上海・徐江区宜山路889号3号楼 邮编: 200233 t (86-21) 61402666 t (86-21) 61402666 f (86-21) 64958763 f (86-21) 64958763



SL52035299185801TX

Date:October 23,2020

Page 3 of 6

III. Test results

Test method	Parameter	Number of tests	Results
	FIGRA _{0.2MJ} (W/s)		27.5
	FIGRA _{0.4MJ} (W/s)		27.5
	Whether lateral flame spread (LFS) to the edge of specimen (Yes/No)		No
EN 13823	THR _{600s} (MJ)	3	1.8
	SMOGRA (m ² /s ²)		16.1
	TSP _{600s} (m ²)		21.8
	Flaming particles or droplets (Yes/No)		No

Test method	Parameter	Specimen number	Results
EN ISO 11925-2	Whether vertical flame spread (Fs) in excess of 150 mm within 60s (Yes/No)	6	No
Exposure = 30 s	Ignition of the filter paper (Yes/No)		No

IV. Classification and field of application

a) Reference of classification

This classification has been carried out in accordance with EN 13501-1:2018.

b) Classification

The product, Mesh, in relation to its reaction to fire behaviour is classified:

Fire behaviour		Smoke production			Flaming	droplets
В	_	S	1	,	d	0

Reaction to fire classification: B-s1, d0

Remark: The classes with their corresponding fire performance are given in annex A.

c) Field of application

This classification is valid for the following end use applications:

- --- With all substrates classified as A1 and A2
- --- With mechanically fixing
- --- No joint



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

3rdBuilding,No.889,Yishan Road,Xuhui District Shanghai,China 200233 中国・上海・徐江区宜山路889号3号楼 邮编: 200233 t (86-21) 61402666 t (86-21) 61402666 f (86-21) 64958763 f (86-21) 64958763



SL52035299185801TX

Date:October 23,2020

Page 4 of 6

This classification is valid for the following product parameters:

--- Characteristics as described in section II b) of this test reports.

Statement:

This declaration of conformity is only based on the result of this laboratory activity, the impact of the uncertainty of the results was not included.

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

Warning:

This classification report does not represent type approval or certification of the product.

The test laboratory has, therefore, play no part in sampling the product for the test, although it holds appropriate references to the manufacturer's factory production control that is aimed to be relevant to the samples tested and that will provide for their traceability.

Annex A

Classes of reaction to fire performance for construction products excluding floorings and linear pipe thermal insulation products

Class	Test method(s	s)	Classification criteria	Additional classification
	EN ISO 1182 a and EN ISO 1716		△T≤30°C, and △m≤50%, and t _f =0(i.e. no sustained flaming)	-
A1			PCS≤2.0MJ/kg ^a and PCS≤2.0MJ/kg ^{b c} and PCS≤1.4MJ/m ^{2 d} and PCS≤2.0MJ/kg ^e	-
	EN ISO 1182 ^a or		<i>∆T</i> ≤50°C, and <i>∆m</i> ≤50%, and t _f ≤20 s	-
A2	EN ISO 1716	and	PCS≤3.0MJ/kg ^a and PCS≤4.0MJ/m ^{2 b} and PCS≤4.0MJ/m ^{2 d} and PCS≤3.0MJ/kg ^e	-
	EN 13823		FIGRA≤120W/s and LFS <edge and<br="" of="" specimen="">THR_{600s}≤7.5MJ</edge>	Smoke production ^f and Flaming droplets/particles ^g
В	EN 13823 and		FIGRA≤120W/s and LFS <edge and<br="" of="" specimen="">THR_{600s}≤7.5MJ</edge>	Smoke production ^f and Flaming droplets/particles ^g
	EN ISO 11925-2 i Exposure =30s		within 60s <i>F</i> s≤150mm	Training dropicts/particles



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

3rdBuilding,No.889,Yishan Road,Xuhui District Shanghai,China 200233 中国・上海・徐江区宜山路889号3号楼 邮编: 200233 t (86–21) 61402666 f (86–21) 64958763 t (86–21) 61402666 f (86–21) 64958763



SL52035299185801TX **Test Report** Date:October 23,2020 Page 5 of 6 FIGRA≤250W/s and EN 13823 and LFS< edge of specimen and Smoke production f and С THR_{600s}≤15MJ Flaming droplets/particles ^g EN ISO 11925-2 i Fs≤150mm within 60 s Exposure=30s EN 13823 FIGRA≤750W/s and Smoke production f and D EN ISO 11925-2 i Flaming droplets/particles ^g Fs≤150mm within 60 s Exposure=30s EN ISO 11925-2 i Ε Fs≤150mm within 20 s flaming droplets/particles h Exposure =15s

F EN ISO 11925-2i Exposure = 15 s Fs>150mm with	in 20 s
---	---------

^a For homogeneous products and substantial components of non-homogeneous products.

- d For any internal non-substantial component of non-homogeneous products.
- e For the product as a whole.
- $^{\rm f}$ s1 = SMOGRA ≤ $30\text{m}^2/\text{s}^2$ and TSP $_{600\text{s}}$ ≤ 50m^2 ; s2 = SMOGRA ≤ $180\text{m}^2/\text{s}^2$ and TSP $_{600\text{s}}$ ≤ 200m^2 ; s3 = not s1 or s2
- ^g d0 = No flaming droplets/ particles in EN 13823 within 600 s;
- d1 = no flaming droplets/ particles persisting longer than 10 s in EN 13823 within 600 s;
- d2 = not d0 or d1.
- Ignition of the paper in EN ISO 11925-2 results in a d2 classification.
- ^h Pass = no ignition of the paper (no classification);
- Fail = ignition of the paper (d2 classification).
- ¹ Under conditions of surface flame attack and, if appropriate to the end–use application of the product, edge flame attack.

#This test was carried out by SGS-CSTC Standards Technical Services (Anji) Co., Ltd



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

3rdBuilding,No.889,Yishan Road,Xuhui District Shanghai,China 200233 中国・上海・徐汇区宜山路889号3号楼 邮编: 200233 t (86–21) 61402666 f (86–21) 64958763 t (86–21) 61402666 f (86–21) 64958763

^b For any external non-substantial component of non-homogeneous products.

c Alternatively, any external non-substantial component having a PCS ≤ 2,0 MJ/m², provided that the product satisfies the following criteria of EN 13823: FIGRA ≤ 20 W/s, and LFS < edge of specimen, and THR_{600s} ≤ 4,0 MJ, and s1, and d0.




SL52035299185801TX

Date:October 23,2020

Page 6 of 6

Photo Appendix:

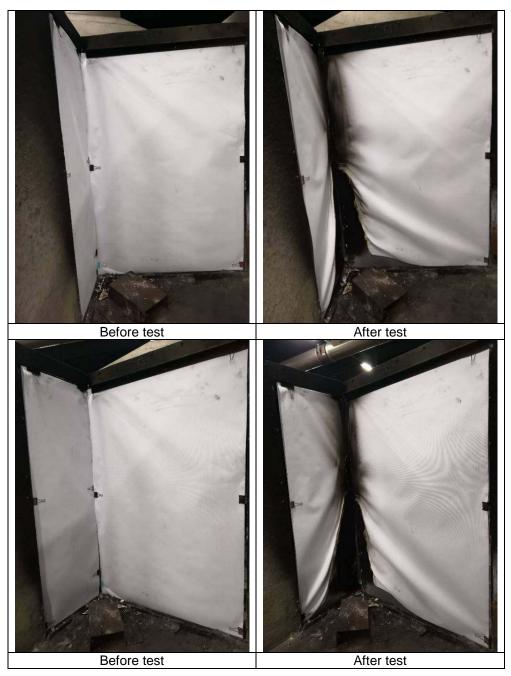

End of Report



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

3rdBuilding,No.889,Yishan Road,Xuhui District Shanghai,China 200233 中国・上海・徐江区宜山路889号3号楼 邮编: 200233 t (86-21) 61402666 t (86-21) 61402666 f (86–21) 64958763 f (86–21) 64958763